

Our miniature MLP series linear potentiometers offer unrivaled performance in an amazingly small size. Though small, the MLP is environmentally robust (IP67), operates over a broad temperature range (-22° to 300°F) and is long lasting (>25 million cycles).

These features make our miniature MLP linear potentiometer the perfect solution for many applications including industrial, medical, automotive, and motion control.

MLP

Miniature Linear Potentiometer

Absolute Linear Position to 6 inches (150 mm)
1.25K - 10K ohms • High Cycle Applications
Industrial Automation, Test and Robotics Applications
IP67 Protection • Extended Temperature Range

General

Full Stroke Ranges	0-0.5 to 0-6 in. (0-12.5 to 0-150 mm)
Output Signal	voltage divider (potentiometer)
Linearity	.5% to 1%, see ordering information
Repeatability	0.01 mm
Resolution	essentially infinite
Life Expectancy	> 25 million cycles
Operating Speed	400 inches (10 M) per second max.
Enclosure Material	aluminum
Sensor	conductive plastic linear potentiometer
Weight	1.6 oz. (46 g) max., see ordering information

Electrical

Input Resistance	see ordering information
Recommended Maximum Input Voltage	42 VDC
Recommended Operating Wiper Current	< 10µA
Electrical Cable	24 AWG Raychem 55M wire with VITON sleeve
Electrical Cable Length	19 inches (500mm)

Environmental

Enclosure Design	IP67
Operating Temperature , Continuous	-22° to 300°F (-30° to 150°C)
Operating Temperature, Short Term	350°F (175°C)
Vibration	up to 10 g to 2000 Hz maximum


MLP

Miniature Linear Potentiometer

Ordering Information

Item Number:	MLP-12	MLP-25	MLP-50	MLP-75	MLP-100	MLP-125	MLP-150
measurement range, in. [mm]:	0.5 [12.5]	1 [25]	2 [50]	3 [75]	4 [100]	5 [125]	6 [150]
resistance, ohms (±20%):	1.25K	2.5K	5K	7.5K	10K	10K	10K
linearity, %:	± 1%	± 1%	± 1%	± 0.5%	± 0.5%	± 0.5%	± 0.5%
weight, oz. [grams]:	.8 [24]	.9 [26]	1 [29]	1.2 [33]	1.3 [37]	1.5 [43]	1.6 [46]

Outline Drawing

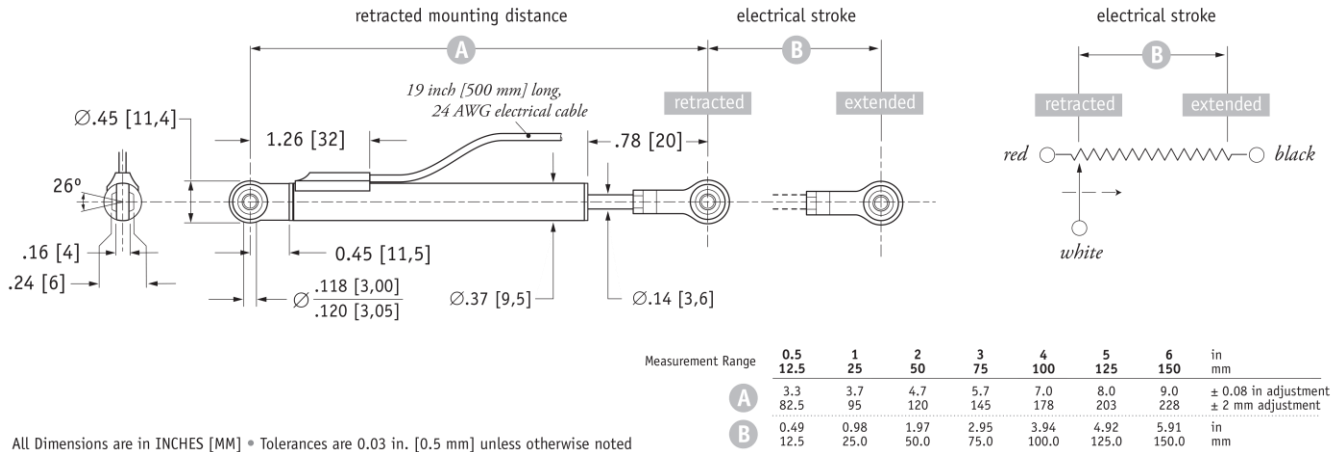

INTERTECHNOLOGY
INC.
1-800-465-1600

19 Waterman Ave. Toronto, Ont. M4B1Y2
Tel: 416-445-5500 Fax: 416-445-1170
Toll Free: 1-800-465-1600
Email: sales@intertechnology.com
Website: www.intertechnology.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

MLP 12/01/2015